


TECHNICAL DRAWING

Floor joint with Sikaflex®

Recessed joint between concrete slabs with coating

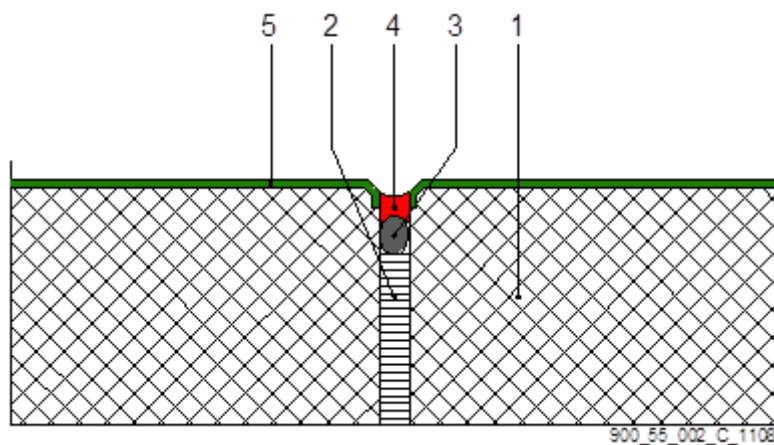

1. Concrete slab
2. Compression profile
3. Backer rod
4. **Sikaflex®** joint sealing
5. **Sikafloor®** coating (detail depends on coating type)

The information contained herein and any other advice are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. The information only applies to the application(s) and product(s) expressly referred to herein and is based on laboratory tests which do not replace practical tests. In case of changes in the parameters of the application, such as changes in substrates etc., or in case of a different application, consult Sika's Technical Service prior to using Sika products. The information contained herein does not relieve the user of the products from testing them for the intended application and purpose. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Services AG
 TM Sealing & Bonding
 Speckstrasse 22
 8303 Pfäffikon
 Switzerland

Version given by
 René Ganz
 Phone: --
 Fax: --
 Mail: ganz.rene@ch.sika.com

Technical Drawing
 Floor joint with Sikaflex®
 11.2013, VERSION 01
 N° 900_55_002_C_1108

Corporate template